PERFORMANCE UPHOLSTERY FABRICS

Fleck Collection

a two colour fleck weave fabric







Bleach













Fleck

A faux leather designed to replicate a two colour fleck weave fabric

Perfect for:

Commercial, cruise, healthcare, hospitality and leisure.

Fabric Specifications

| Flame retardant | BS7176 Crib 5, BS EN 1021-1:2006 1&2, BS5852 |
|----------------------------|--|
| Anti-bacterial/Anti-fungal | Resistant to microbial or fungal growth including |
| Waterproof | Hydrostatic Head BS3424 > 1 metre. |
| Martindale | Severe Contract > 300,000. |
| Stain resistant | Excellent stain removal has been observed for g iodine, betadine, ketchup, chewing gum, choco |
| Composition | 2% Vinyl Acrylic, 80% PVC, 9% Cotton, 9% Polye |
| Width | 140cm (55") wide. |
| Weight | 750 gsm (<u>+</u> 37). |
| | |

Technical Information

- We recommend a minimum of 32 stitches per 10 cm (8 stitches per inch) and seams must have a minimum 12mm (0.5") bite on the fabric.
- Can be stitched, tacked and glued. Cannot be heat welded.
- Please note that all fabric offered is subject to minor tolerance in respect of shade and other slight variations.

Fabric Care

- Poorly fixed clothing dyes, e.g. denim, will cause permanent staining. Most stains can be removed using cold/warm water and a clean micofibre cloth.
- Use a vacuum cleaner or soft brush to remove dust and solid particles.
- Wipe frequently with a damp cloth to maintain the appearance of the fabric.
- Remove all stains immediately before they set. All spillages should be removed immediately with a clean absorbent cloth.
- If soap based cleaners are used, all soap residues must be rinsed from the fabric.
- Can be steam cleaned in situ.
- Do not machine wash or dry clean.

Our Environmental Policy

Our products have always been phthalate free and Reach* compliant. Our processes are non-toxic and the methods used during manufacture and finishing ensure that potentially hazardous accidental cross contamination is minimised to the greatest degree possible. All our fabrics meet the stringent Oeko-Tex**

standards, regardless of origin, so are free from harmful chemicals and safe for human use.

** See more: www.oeko-tex.com

the fabric.

Samples and Enquires

Vyva Fabrics TT. Vasumweg 140 1033 SH Amsterdam, The Netherlands Tel +31(0)20-6599523 info@vyvafabrics.nl samples@vyvafabrics.nl www.vyvafabrics.nl



Fleck

| 2006 1&2, BS5852 Crib 5, IMO Annex 1 Part 8. |
|--|
| gal growth including Salmonella, E Coli and MRSA. |
| l metre. |
| |
| peen observed for grease, ink, blood, urine, coffee, newing gum, chocolate, grape juice. |
| % Cotton, 9% Polyester. |
| |
| |
| |
| |
| |
| Fleck can be colour co-ordinated with other Agua collections to produce stunning dual textured finishes. |
| • Bespoke colours can be produced subject to minimum quantity orders. |
| Technical specifications may be amended, please check for the latest information. |

• Please ask if you require a sample of the current batch available but be aware that stock can move quickly.

• Can be cleaned with mild Hypochlorite solutions (10,000 ppm of available chlorine) e.g.: Haz Tabs, Chlor-Clean. Continued use may cause discolouration and surface damage.

• Always try cleaning products on a hidden piece of fabric to test suitability.

• Do not use: solvents, abrasives, chemical agents, waxes or polishes as this will damage the surface of

• Do not use marker pens on the back of the fabric. • Please refer to the Fleck Fabric Technical Specifications PDF download on the Agua website

for further details.

* Registration, Evaluation, Authorisation and Restriction of Chemicals (EU regulation: 18th December 2006)




Fleck Limestone

Fleck Fawn

Fleck Sand

Fleck Lichen

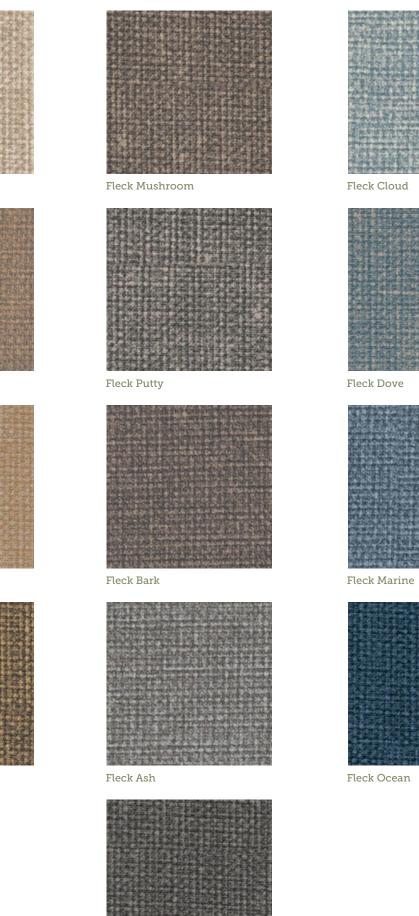

AGUA






Fleck Cornflower



Fleck Aqua



Fleck Leaf



Fleck Seagrass



Fleck Moss















Fleck Petal



Fleck Blush



Fleck Kingfisher



Fleck Russet



Fleck Brick